
PF 200 Flush Exit Device






Door Closed

Door Open

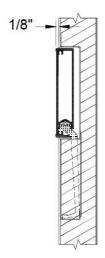

SPECIFICATIONS

Lengths	 24" For width of 2'5" and wider 14" For width of 1'7" to 2'4-15/16
Height	• 4-3/8"
Projection	• 5/8" Closed 1/8" Open
Centerline from bottom of door	• 39-9/16" • 36-3/4"
Finishes	 628 Satin Anodized Aluminum 710 Dark Bronze Anodized Black Insert to match door body Architectural metal inserts: 629, 630,707, 667, 710

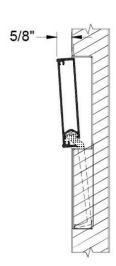


Flush Exit Device

- ADA compliant
- Fire rated up to 3 hours
- Available with levers, operating grips or exit only
- Only electrical unlatching function available
- Factory installed as an integral part of the Total Door System



TDH 100 Electromagnetic Holder

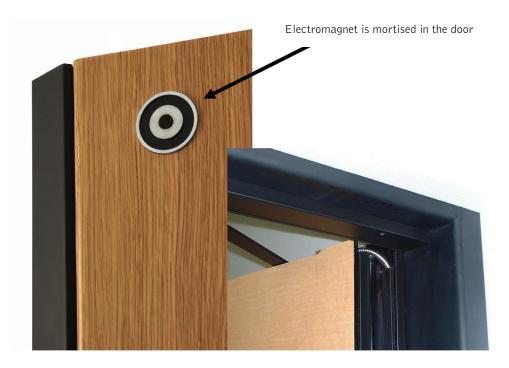

Semi-concealed loop runs through hinge and frame

SPECIFICATIONS

Wall Mount Armature Lengths	13/16" to 2-13/16"
Size	1-3/8" Diameter
Projection	1/8" Off door body
Holding Force	40 LBS


Features

- Factory mortised in the door as an integral part of the Total Door System
- Pre-wired to eliminate the outlet box and coordination with the electrician
- 24 Volt DC 0.3 AMP transformer is included



TDC 96P Concealed Closer



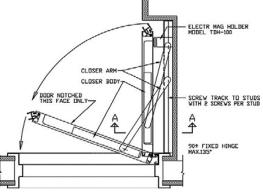

TDC 96P Pocketed Application

SPECIFICATIONS

Degree of Swing	Up to 135°
Minimum Door Size	1'6"
Adjustability	Latching, Closing & Cush Stop
Mounting Location	Mortised in top rail of door
Application Type	Pocket

Concealed Closer

- Fire rated to 3 hours
- Adjustable to sizes 1 through 5
- Retrofit to existing frames without mortising the frame
- Arm and track hidden when door is open
- Track and arm are color matched to door's hinge and locking channel
- Improved ADA compliance cam action is 60% more efficient than a standard rack & pinion closer

 $\textbf{Note:} \ \mathsf{For} \ \mathsf{abusive} \ \mathsf{applications} \ \mathsf{use} \ \mathsf{the} \ \mathsf{TDC5051} \ \mathsf{closer}$

